



BYOD Room Installation Guide

# EXPAND Vision 5

# USB mode (BYOD) Installation Guide

## Requirements

### Included:

- EXPAND Vision 5
- EXPAND Control (Optional) network cable included.
- HDMI Cable (Connects EXPAND Vision 5 and the Display/Monitor)
- Power supply

### Not included:

- Network cable (Connects EXPAND Vision 5 and network port)
- Display / TV Monitor
- USB-C to USB-C Cable
- HDMI Cable (For content sharing)

### Optional:

- USB-C to USB-C Cable (Connects your laptop to the camera if you are in a BYOD room)
- HDMI Cable (Content sharing from your laptop)
- EXPAND 80 Speakerphone + 2 extension mics for EXPAND 80

# What to Consider

## Prerequisites

The BYOD mode allows you to participate in any type of meeting (Teams, Zoom, Webex, Ring Central, etc.) from either your laptop browser or application without the need for room licenses.

In a BYOD meeting room, the EXPAND Controller is not strictly necessary. However, it provides the ability to manage and configure the EXPAND Vision 5, including camera and volume adjustments. If your setup does not include a controller, we recommend ordering the EPOS Remote Control for easy access to the settings menu, where you can adjust the camera and volume.

### Network Ports:

- Two network ports in the same subnet are required to pair the EXPAND Controller with the EXPAND Vision 5 video bar.
- One of these ports must support Power over Ethernet (PoE) to power the EXPAND Control when connected with a network cable.

### Firewall Setup for EPOS Manager:

Open firewall port 443 over tcp outbound.

For accessing application URL's:

<https://enterprise.eposaudio.com>

<https://uiapi.enterprise.eposaudio.com>

<https://api.enterprise.eposaudio.com>

<https://video.enterprise.eposaudio.com>

For accessing static content (device image, description, software and firmware):

<https://update.eposstorage.com>

For Logging:

<https://agentlog.table.core.windows.net/>

Check out the admin guide here:

[8e5c645a-69bc-484b-8247-ec96fd2147e1\\_39048\\_admin-guide\\_epos-manager\\_original.pdf](https://8e5c645a-69bc-484b-8247-ec96fd2147e1_39048_admin-guide_epos-manager_original.pdf)  
([eposaudio.com](https://eposaudio.com))

## EPOS Manager

### How to enroll EXPAND Vision 5 to EPOS Manager


Sign up for a tenant here:

[EPOS Manager \(eposaudio.com\)](https://eposaudio.com)

### Log in to the EPOS Manager tenant:

Choose Provision > Create quick connect code

Enter the data relevant to your video device. If you do not limit the 'Number of Devices Allowed', the QR code can be reused for multiple video devices. After entering the data, select 'Save'. Then, use the QR code to enroll the device with the provided settings and register it with the EPOS Manager.

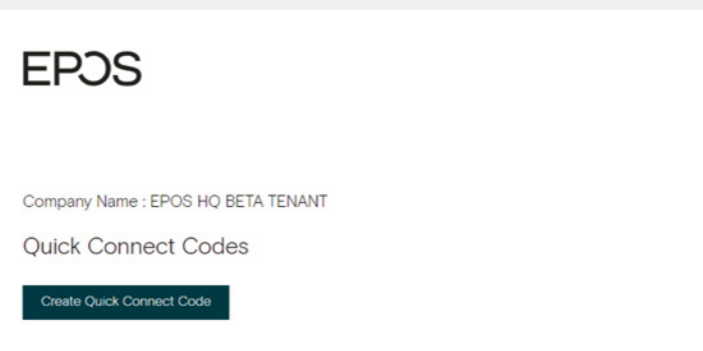


**EPOS**

Company Name : EPOS HQ BETA TENANT

Quick Connect Codes

[Create Quick Connect Code](#)

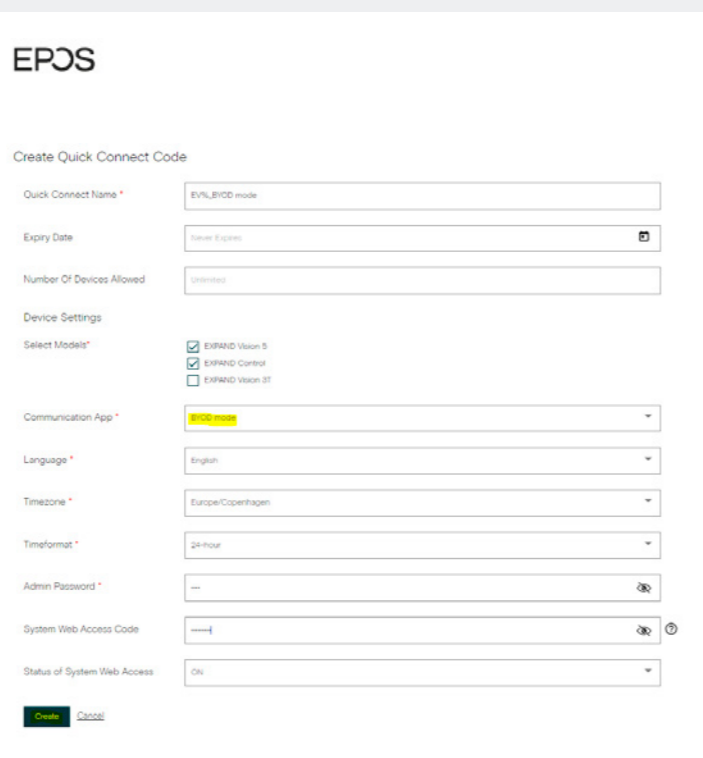

**EPOS**

Create Quick Connect Code

Quick Connect Name \*

Expiry Date

Number Of Devices Allowed

Device Settings

Select Models\*  EXPAND Vision 5  EXPAND Control  EXPAND Vision 3T

Communication App \*

Language \*

Timezone \*

Timeformat \*

Admin Password \*

System Web Access Code

Status of System Web Access

[Create](#) [Cancel](#)

Quick Connect QR Code: GXQICL7P7




[Download QR Code](#)

[Copy QR Code](#)

Use the QR code to enroll multiple devices into EPOS Manager with relevant settings. (NB! Do not use this QR code for your deployment, make sure you create your own)

## Setup & Installation

### First time setup / Enrollment with QR code

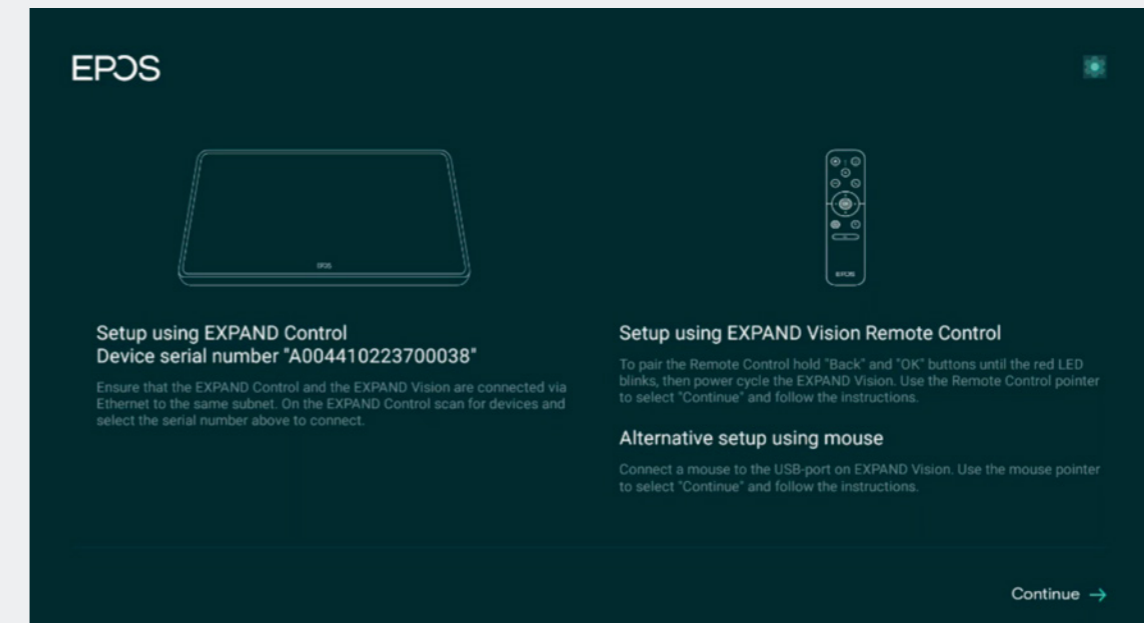

**EPOS**

**Setup using EXPAND Control**  
Device serial number "A004410223700038"

Ensure that the EXPAND Control and the EXPAND Vision are connected via Ethernet to the same subnet. On the EXPAND Control scan for devices and select the serial number above to connect.

**Setup using EXPAND Vision Remote Control**

To pair the Remote Control hold "Back" and "OK" buttons until the red LED blinks, then power cycle the EXPAND Vision. Use the Remote Control pointer to select "Continue" and follow the instructions.


**Alternative setup using mouse**

Connect a mouse to the USB-port on EXPAND Vision. Use the mouse pointer to select "Continue" and follow the instructions.

[Continue →](#)

Connect all the necessary cables to the EXPAND Vision 5. Remember to always attach the power cord last. Once all cables are properly connected, allow the device to boot up.

For more information see the Wiring Diagrams here [here](#).

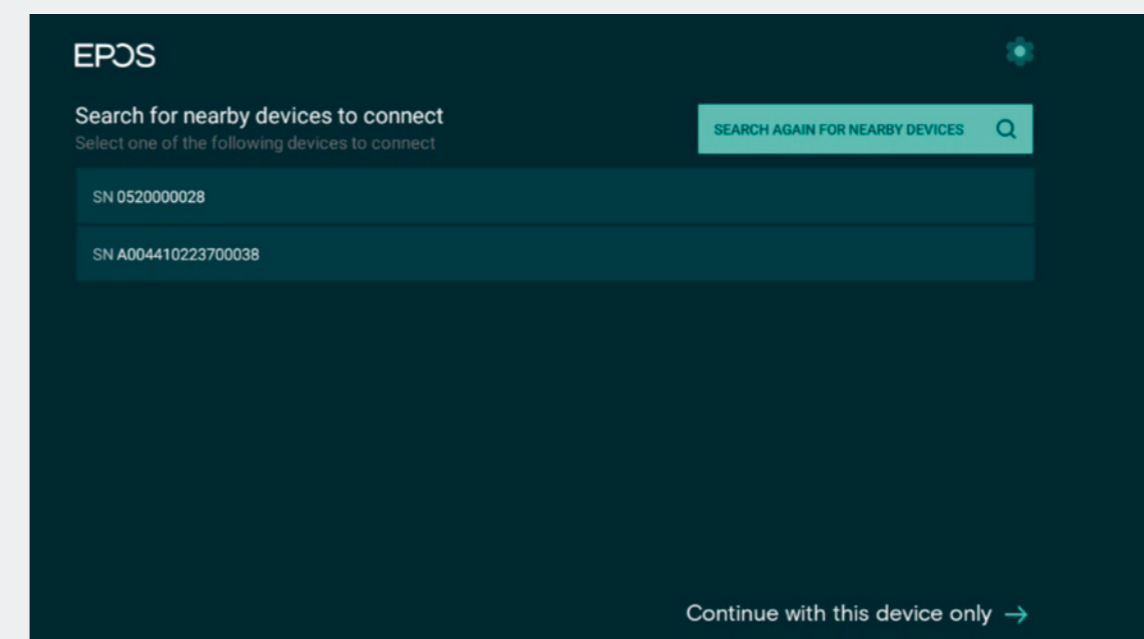

**EPOS**

**Search for nearby devices to connect**

Select one of the following devices to connect

[SEARCH AGAIN FOR NEARBY DEVICES](#)

SN 0520000028

SN A004410223700038


[Continue with this device only →](#)

Attach the PoE network to the EXPAND Control with enclosed network cable. Choose the serial number of the EXPAND Vision 5. Serial number is displayed on the monitor.




Use the created QR code to enroll the devices into EPOS Manager. The system will automatically deploy the settings contained in the QR code and upgrade the EXPAND Vision 5 and EXPAND Control to the latest FW.


### Enrollment without QR code

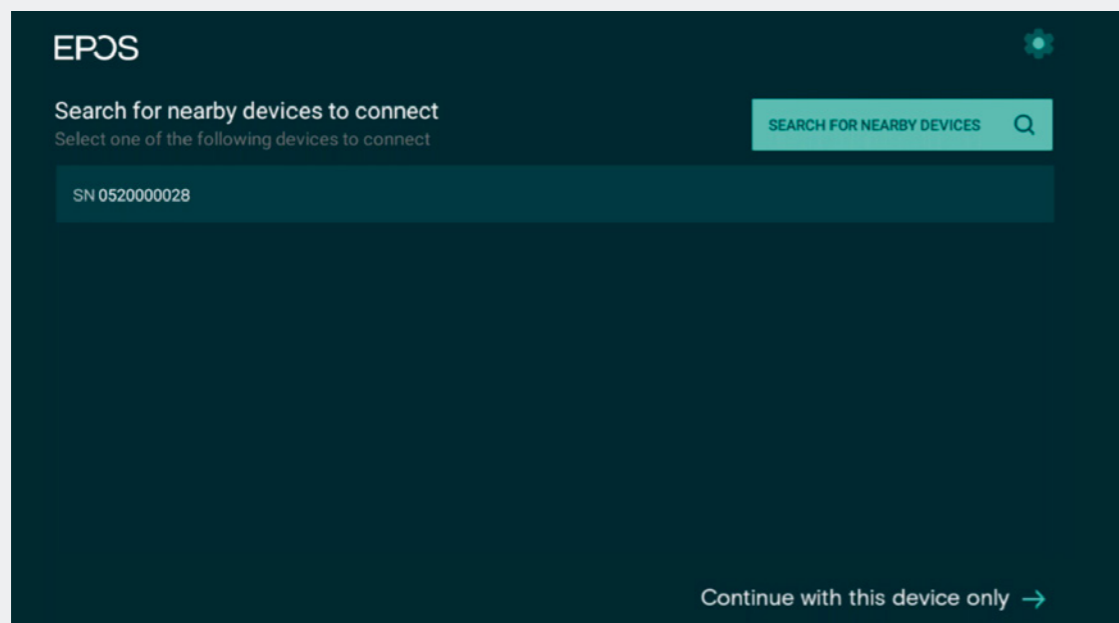


Choose Continue with this device only.

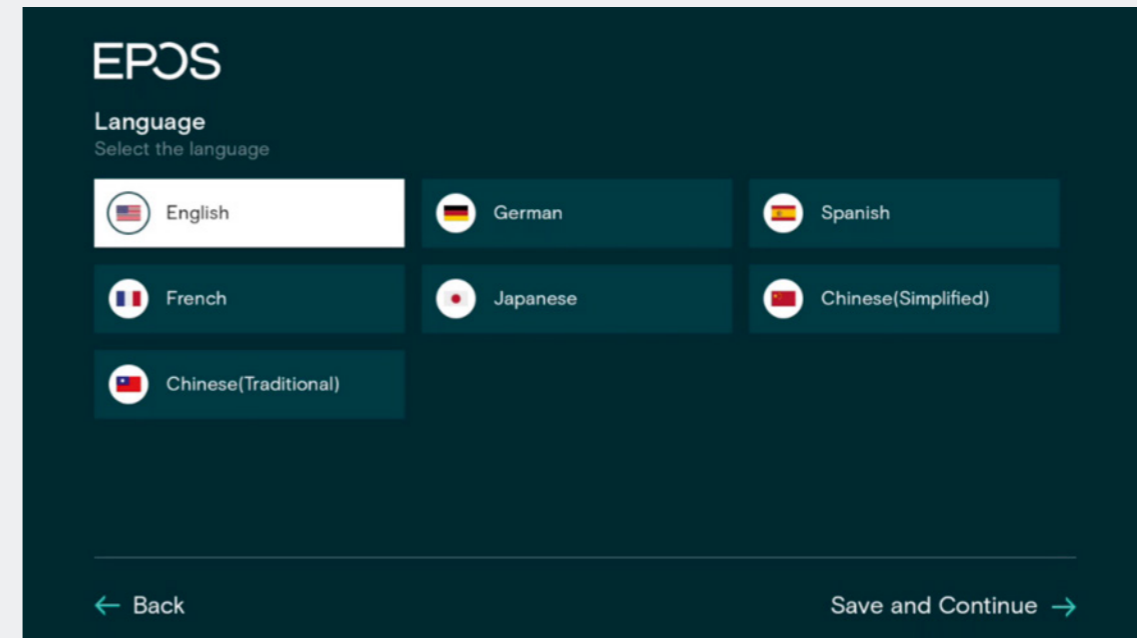


Choose Language > Save and Continue.

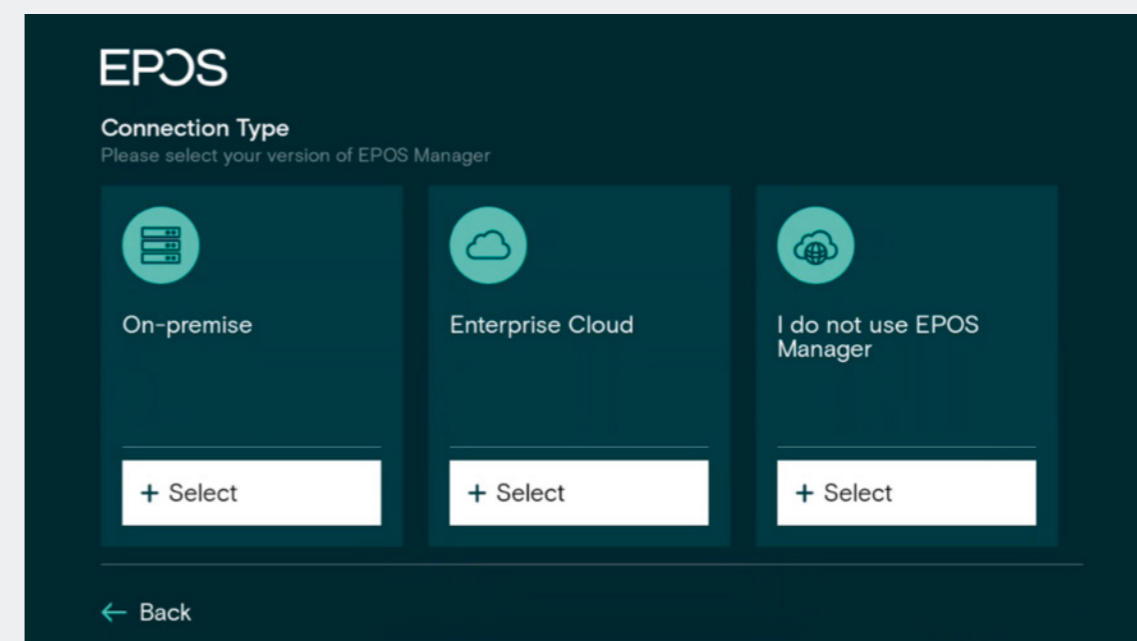


I do not use EPOS Manager > choose select.

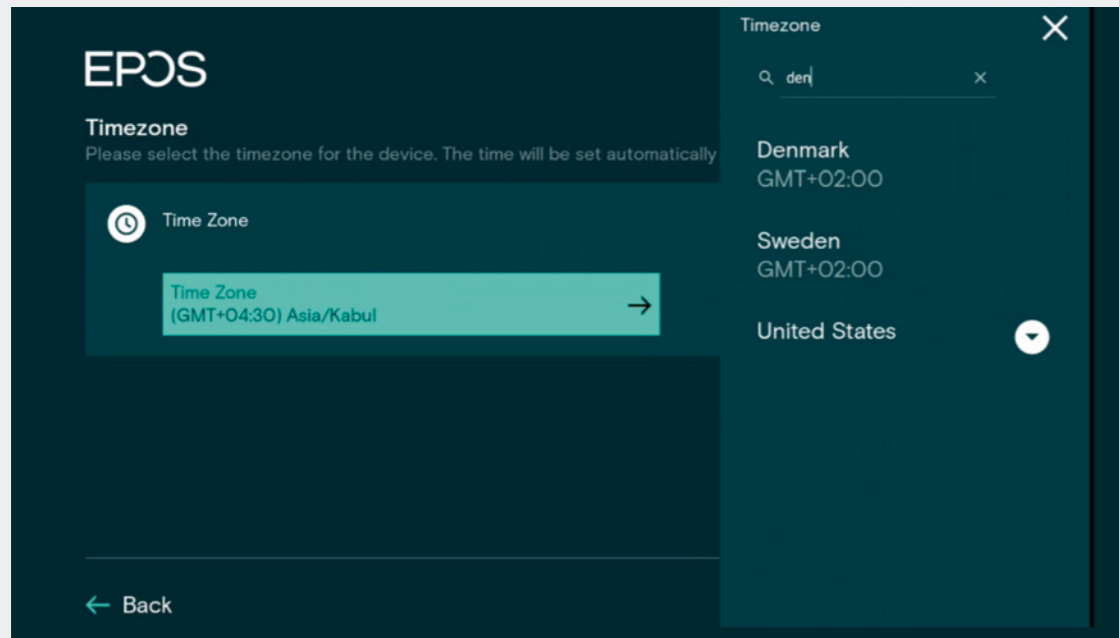


Search for your Time zone.

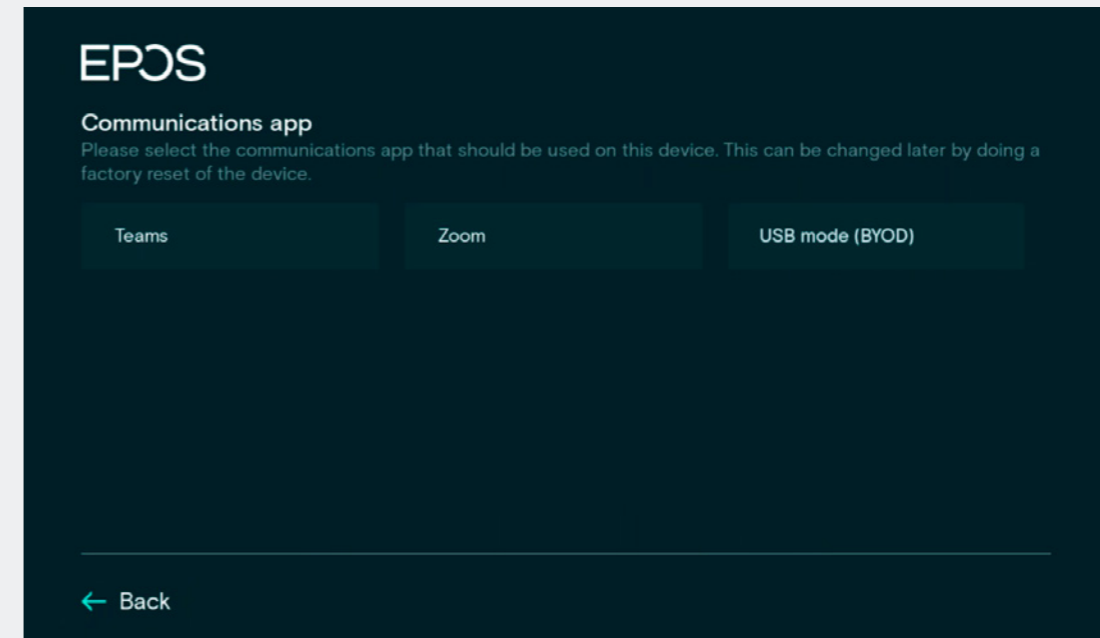


Choose USB mode (BYOD).

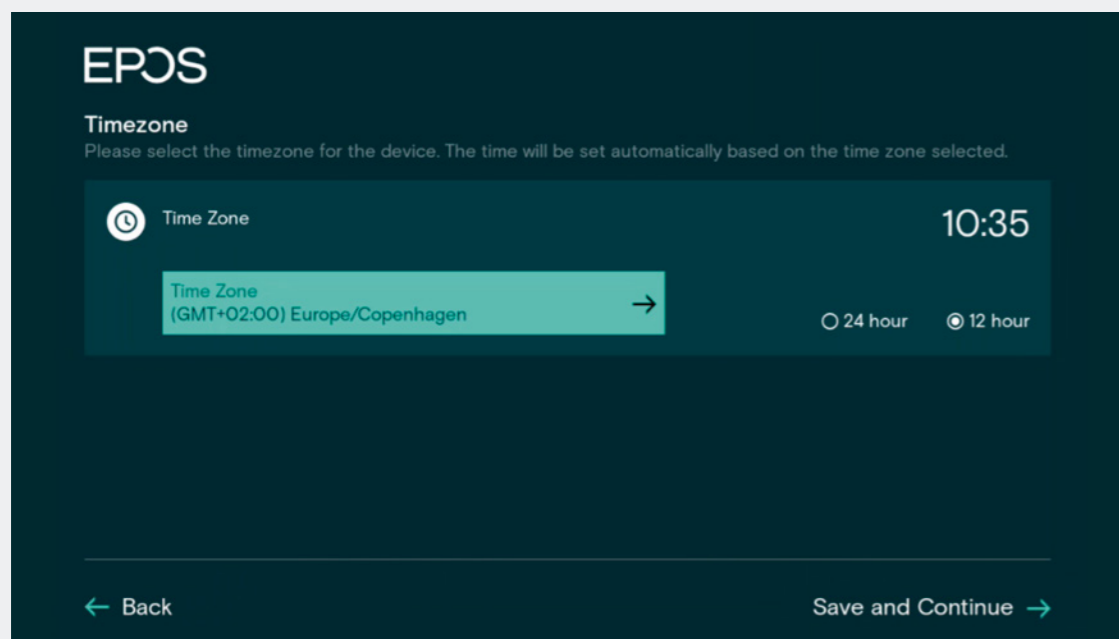

Pick your Country / Time zone and hour.

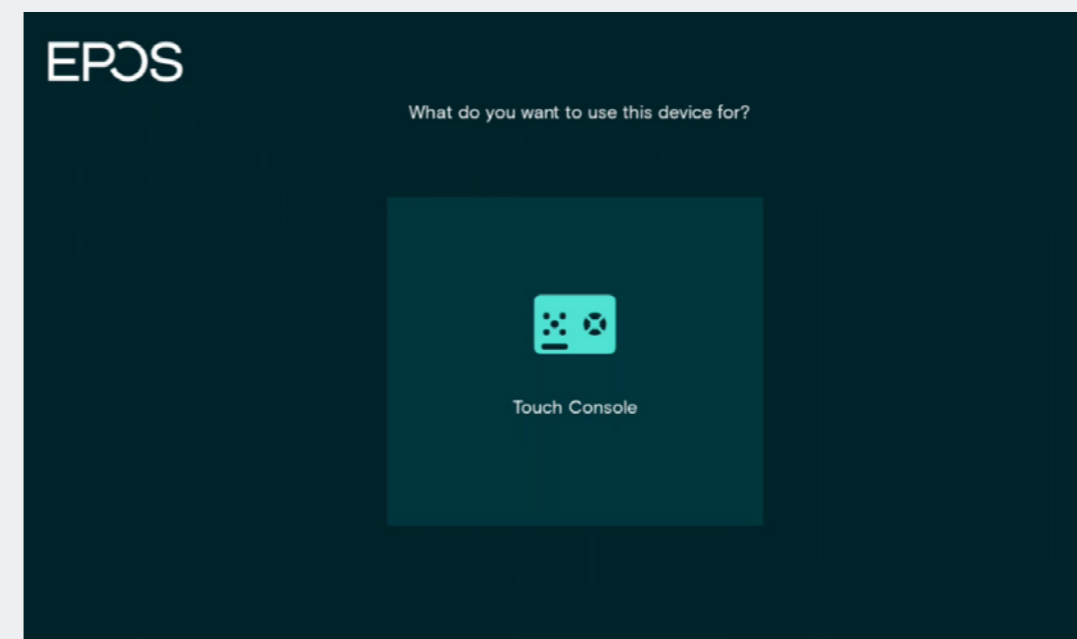

Choose Touch Console.

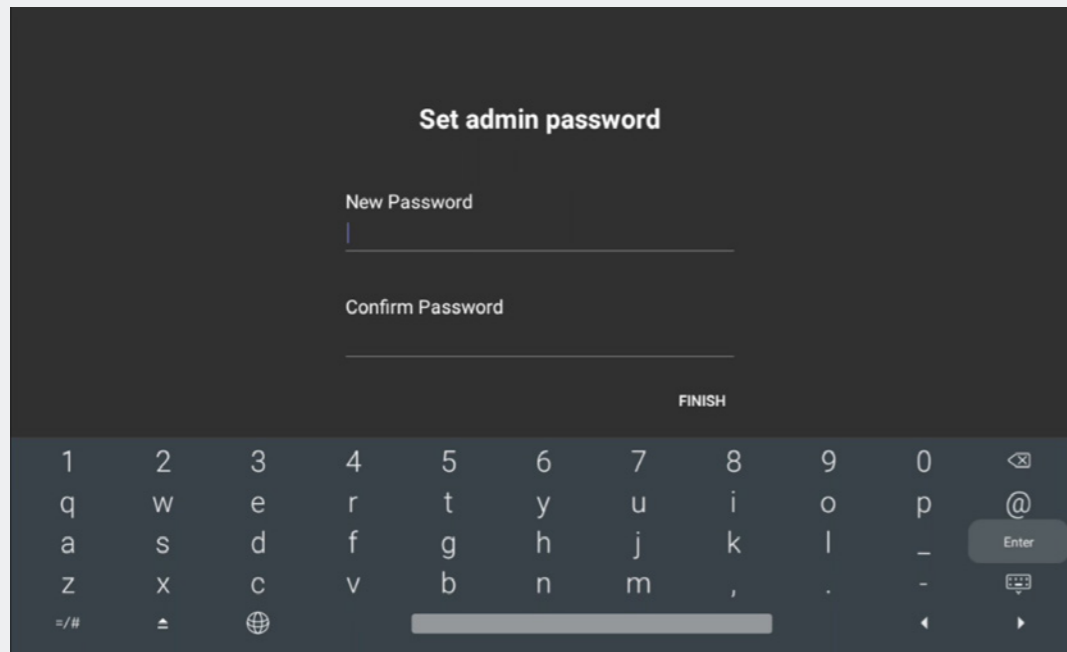

Choose Finish and setup is completed. Default password is 0000 but best practice is to change this.


**Setup is completed.**



Connect a USB-C cable to the device's USB-C port and a HDMI cable to the 'HDMI in' of the EXPAND Vision 5. Then, connect these cables to your laptop to facilitate the BYOD meeting.


## Device Settings

### Update Language

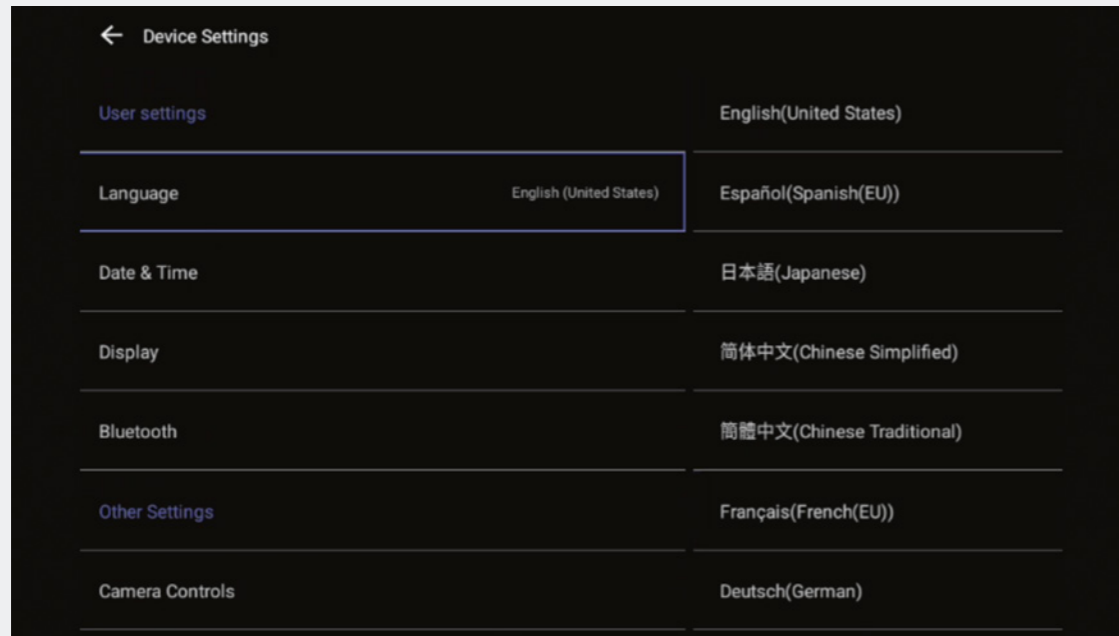



Choose your local language.

### Update Date & Time

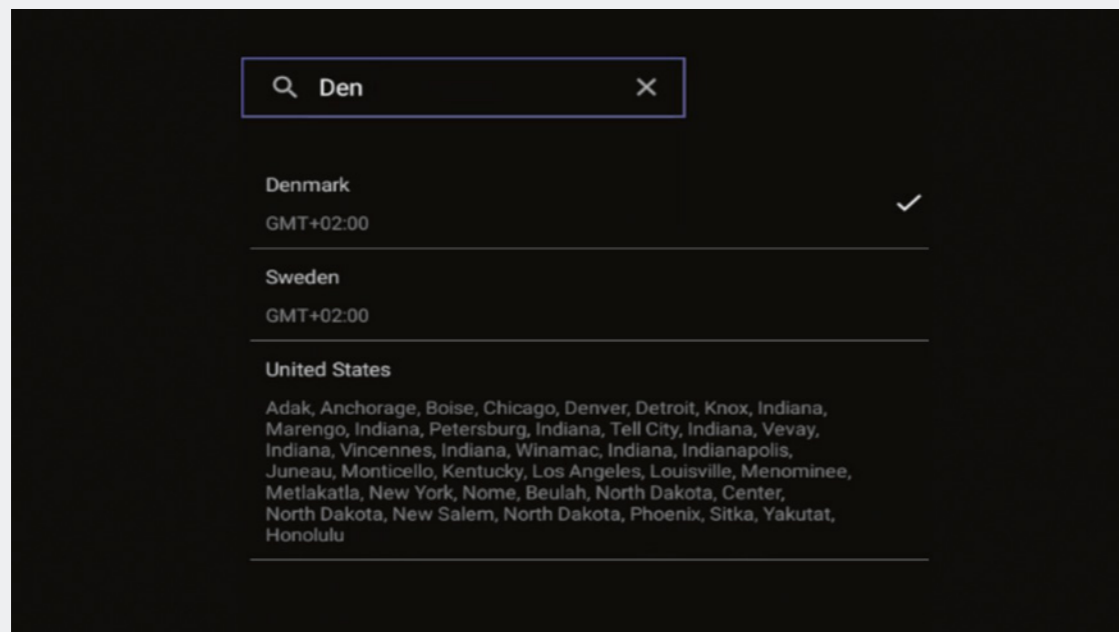

Choose relevant Time Zone.

## Device Name

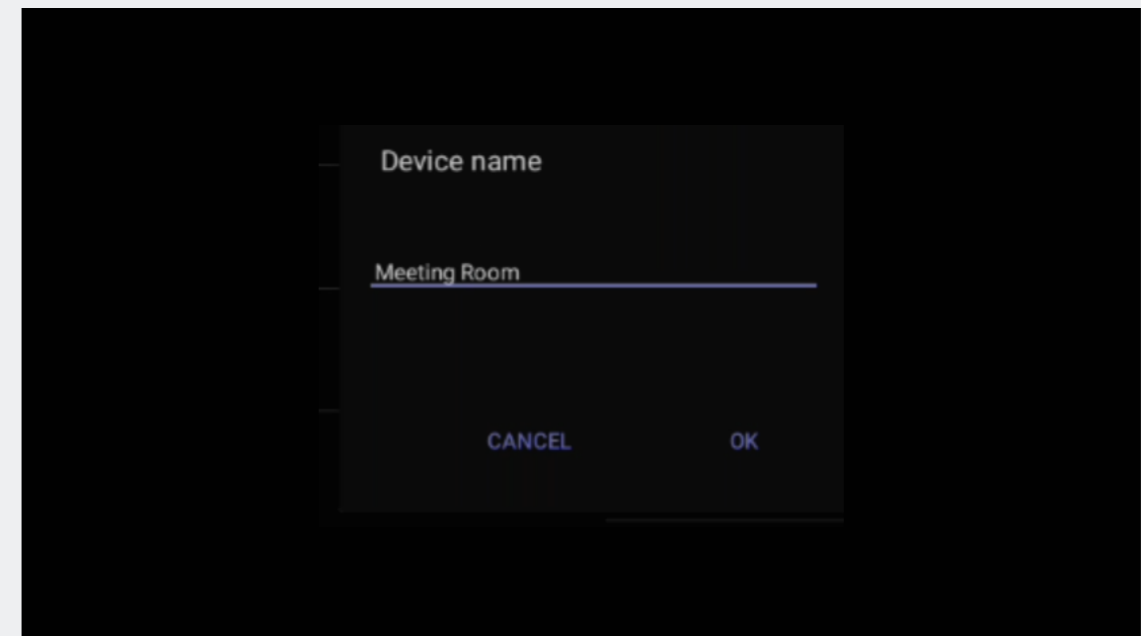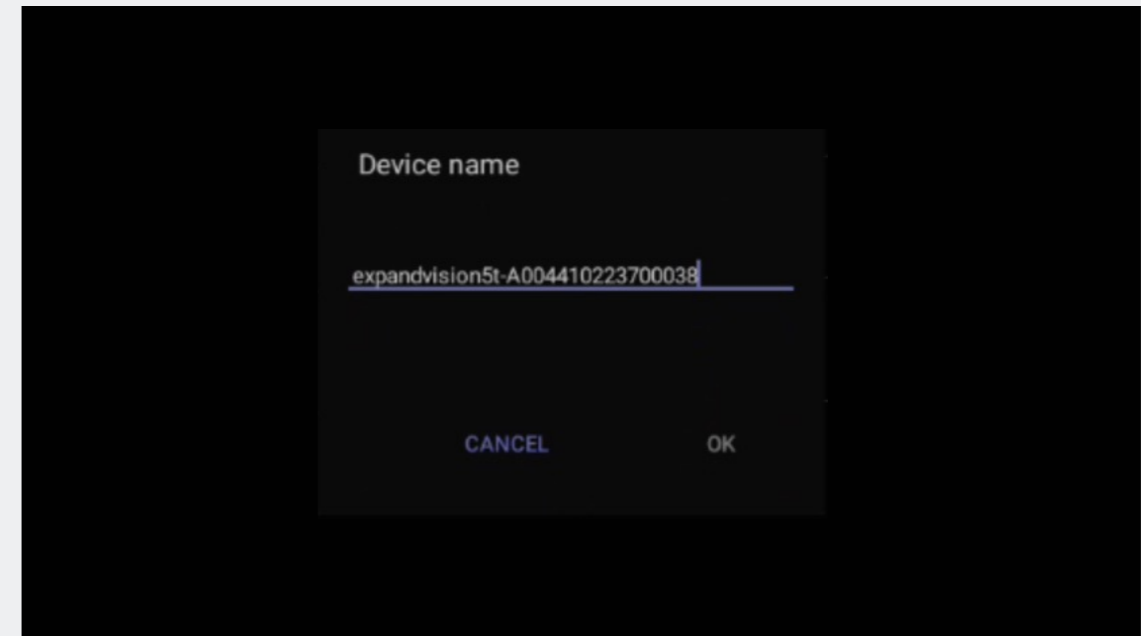

To assign a unique name, delete the default and insert device name according to your naming policy. The name will automatically be synced into EPOS Manager, if enrolled.

## Admin Settings

← Device Settings

Device name

Admin settings

Network

Wi-Fi

Debug tools

Admin password

USB Mode

Teams admin settings

Sign Out

Admin password

Enter admin password

ENTER

Best practice is to change the default admin password which is 0000.

## Verify Device Details

← Device Settings

Debug

IP Address 10.71.160.73

About

Device Serial Number A004530221400124

Device name

Firmware Version 1.4.23139.06

Admin settings

Partner App Version 1.0.23139.04

Network

Company Portal Version 5.0.5484.0

Wi-Fi

Admin Agent Version 1.0.0.202301162118.product

Debug tools

Teams Version 1449/1.0.96.2023041207

Device Settings > About display serial number, ip address and versions.

## Network Settings

Current password

Enter current password

New password

Enter new password

Confirm password

Confirm new password

SAVE

Insert relevant information and choose SAVE.

← Device Settings

IP address 10.71.160.73

About

Netmask 255.255.255.0

Device name

Gateway 10.71.160.73

Admin settings

DNS 1 10.100.117.117

Network

DNS 2 10.100.117.117

Wi-Fi

MAC Address 00:16:94:70:C3:96

Debug tools

Ethernet IP mode DHCP

Admin password


Enable IPv6

USB Mode


Proxy

Static IP > Choose Ethernet IP mode.




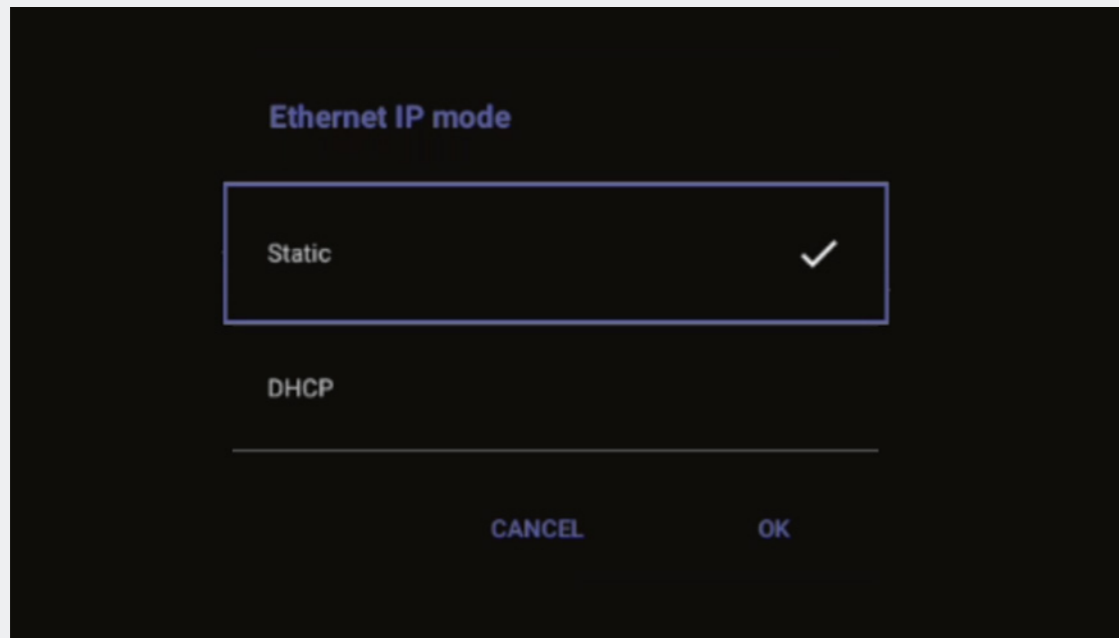

Choose static and then OK.

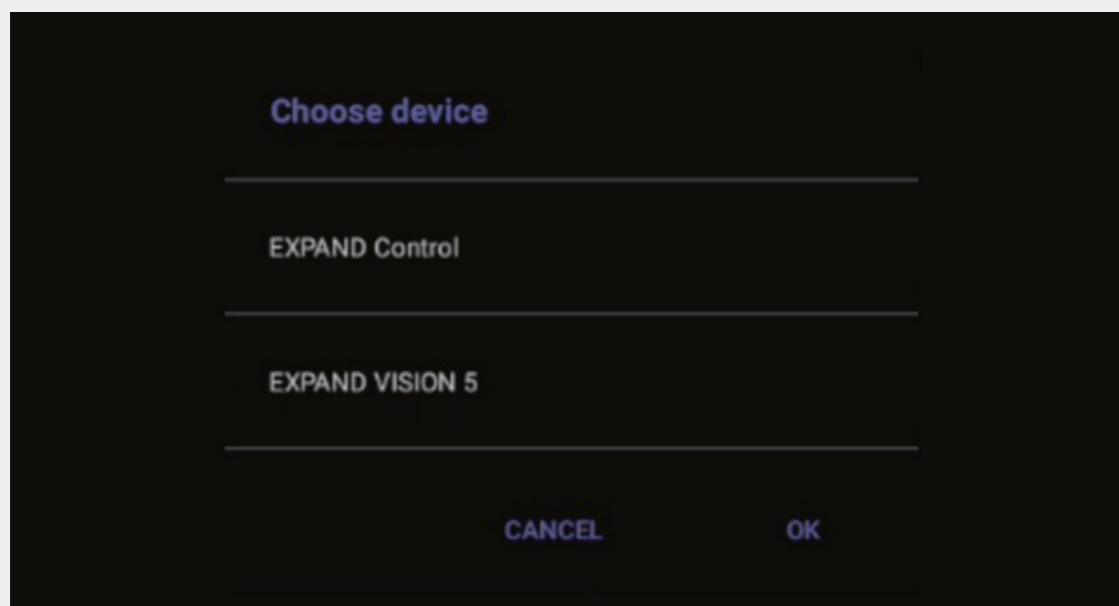


Choose relevant unit. It is recommended to start with the EXPAND Vision 5 as you will lose pairing between EXPAND Control and EXPAND Vision 5 once IP address is changed. Afterwards, change the IP address of the EXPAND Control. You may need to reboot both devices to get the pairing running again. **NB! The devices must be in the same subnet to successfully pair.**

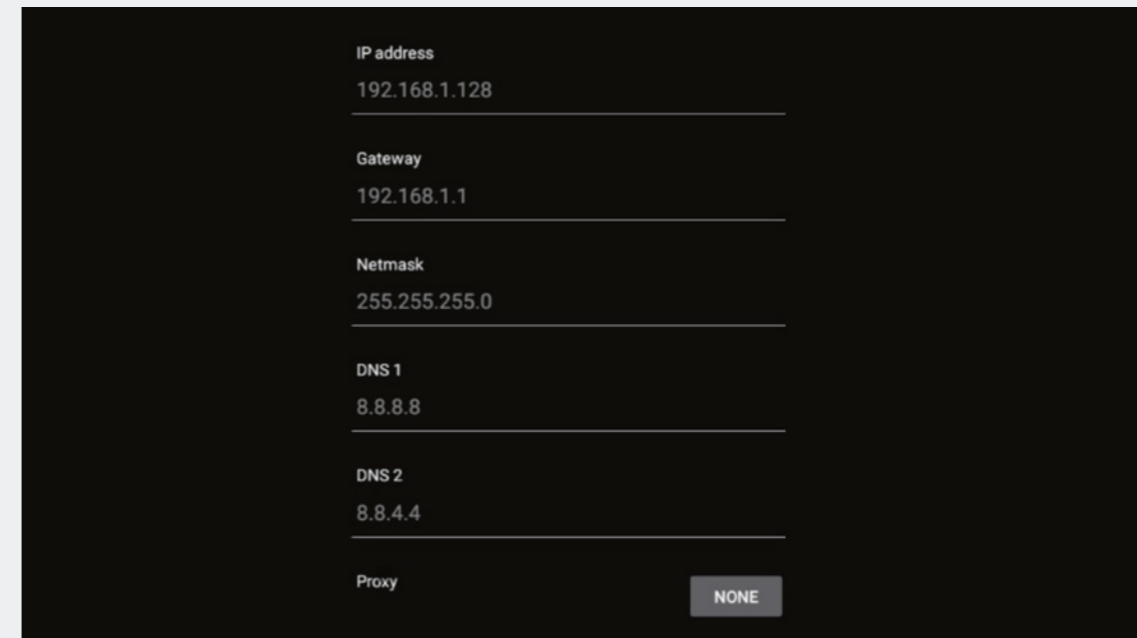


Insert your network data

## Proxy Settings

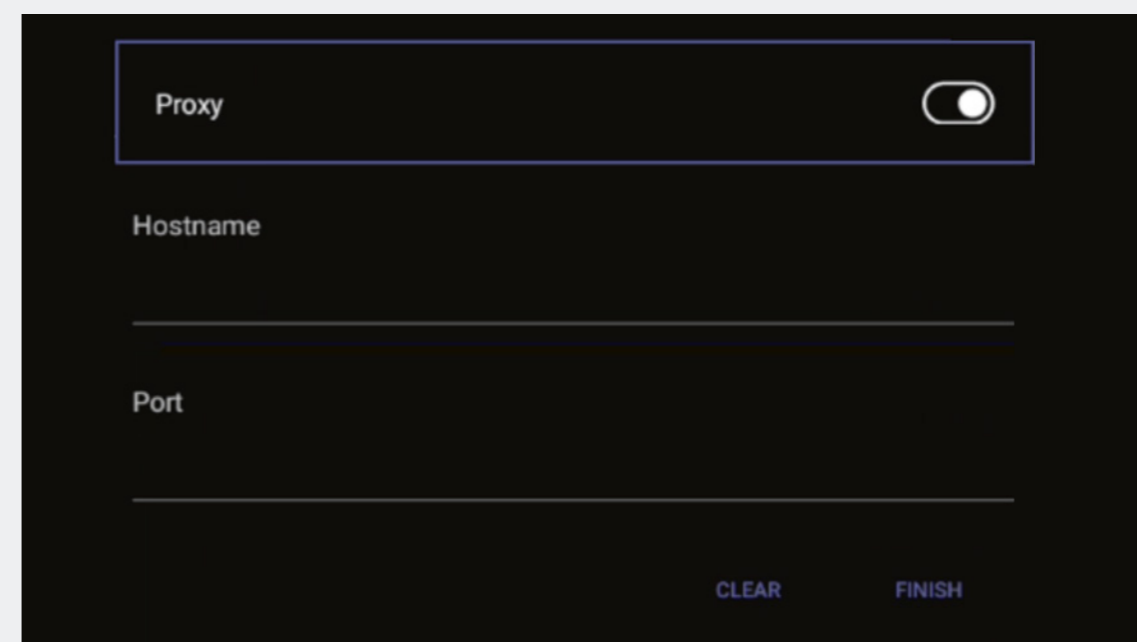


Device Settings > Proxy Enable Proxy and insert Hostname and Port (Optional).

## USB Mode

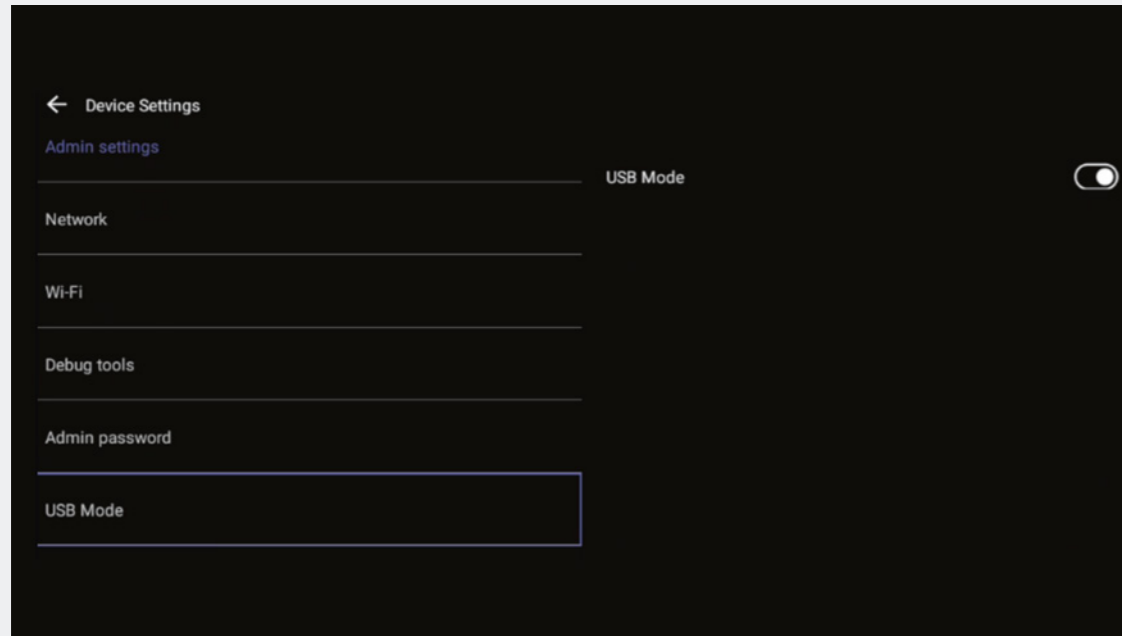


USB mode is on by default

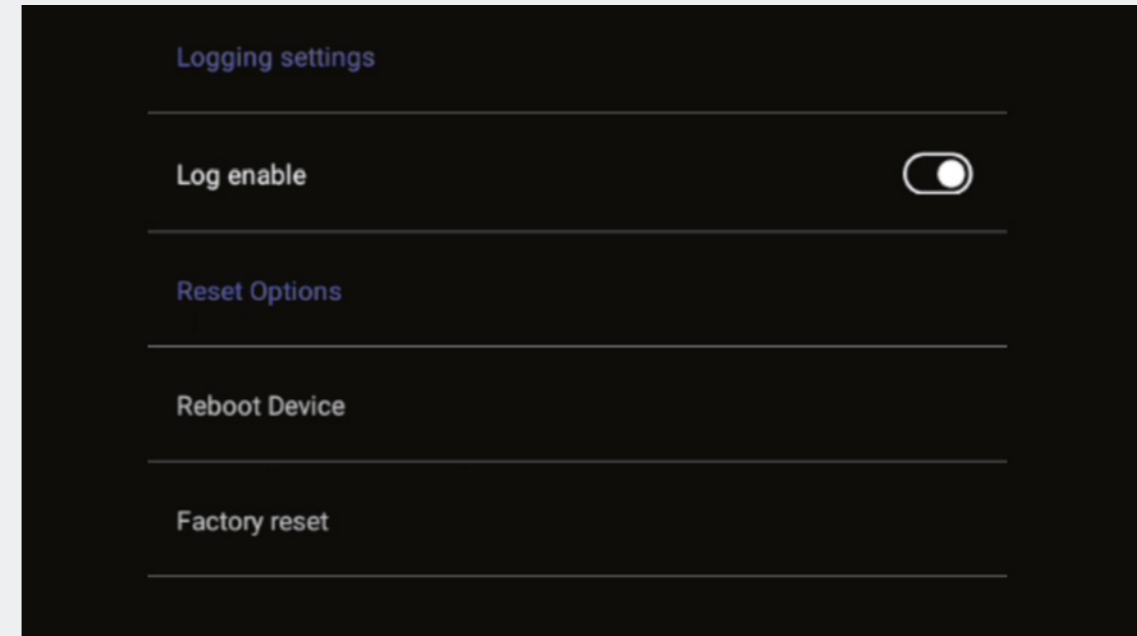


Choose Factory reset.

## Factory Reset – EPOS EXPAND Vision 5

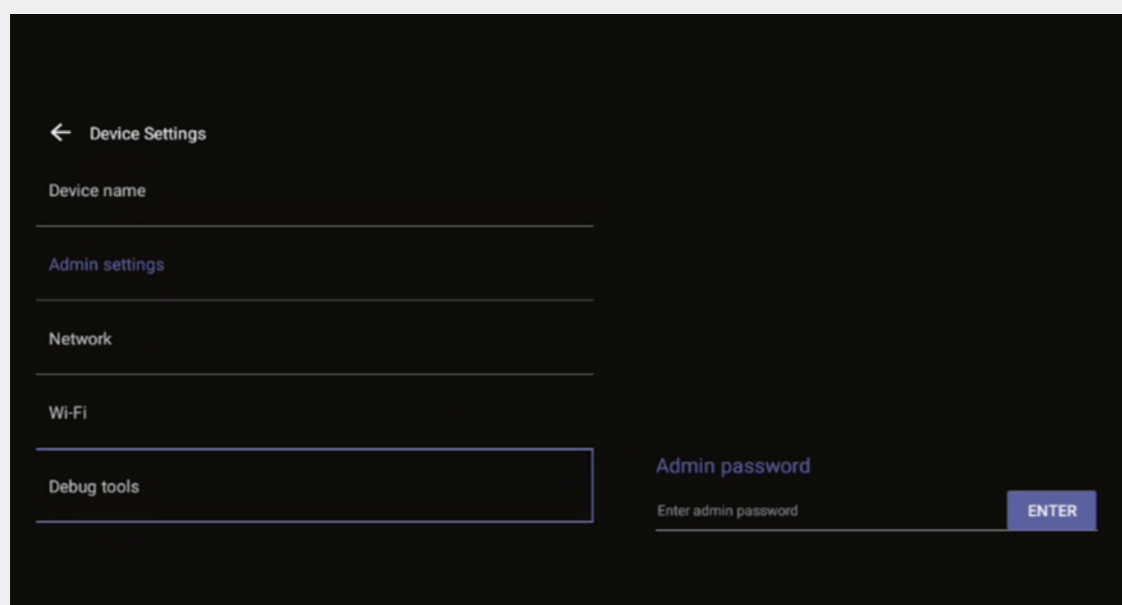


Device Settings > Debug Tools > default password is 0000.  
Always start with the video device as pairing will be lost between controller and video device.


## Factory Reset – EPOS EXPAND Control

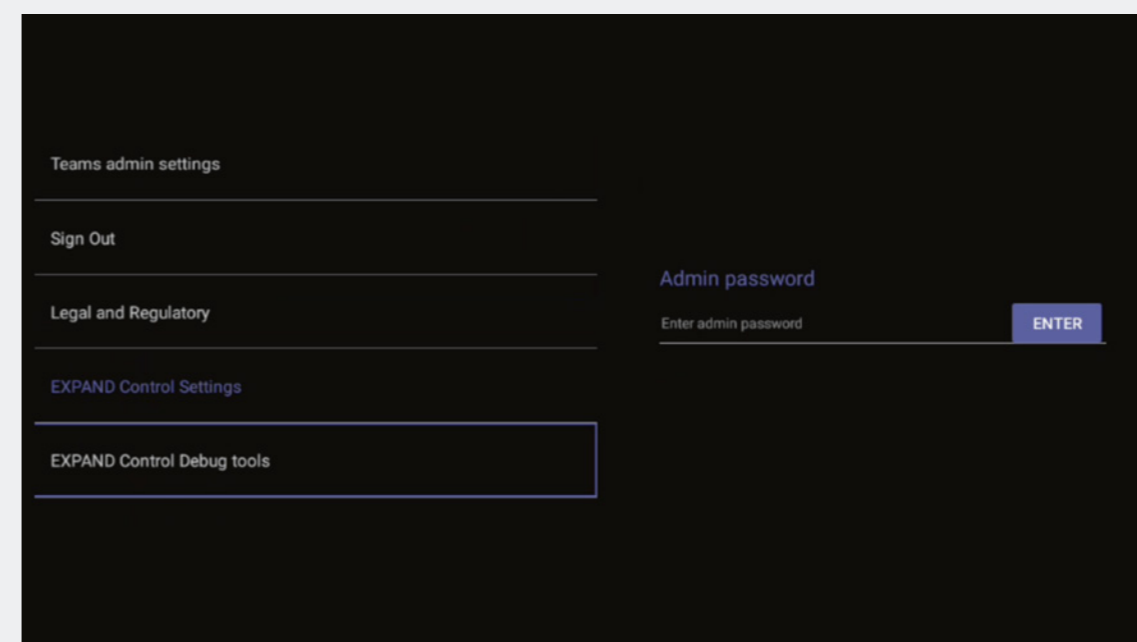

Device Settings > EXPAND Control Debug Tools > default password is 0000.

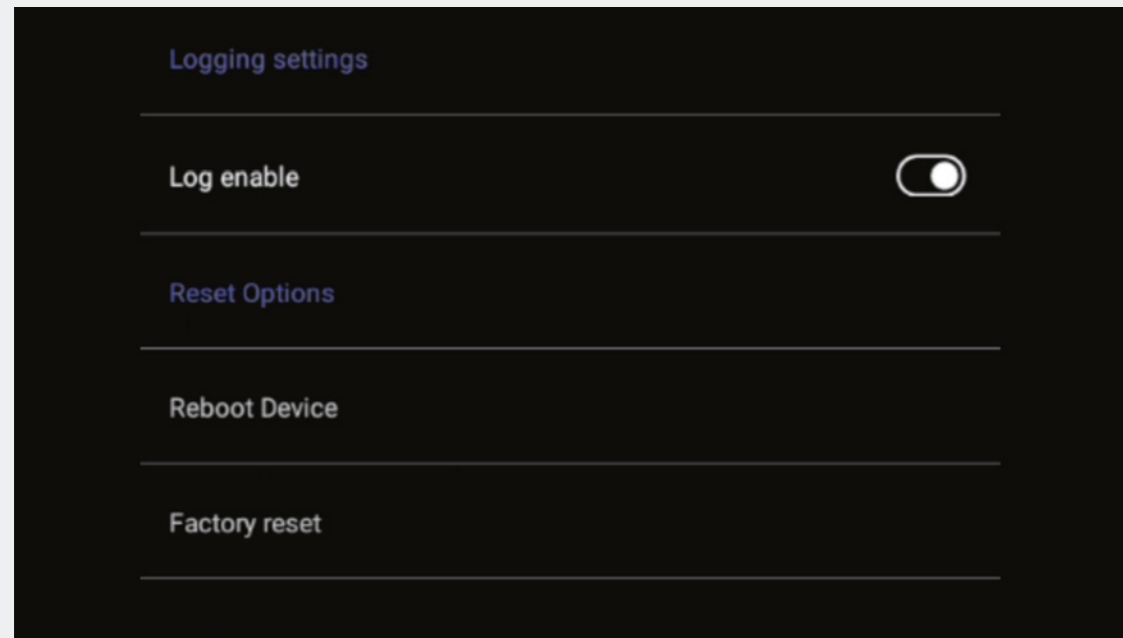


Choose Factory reset.

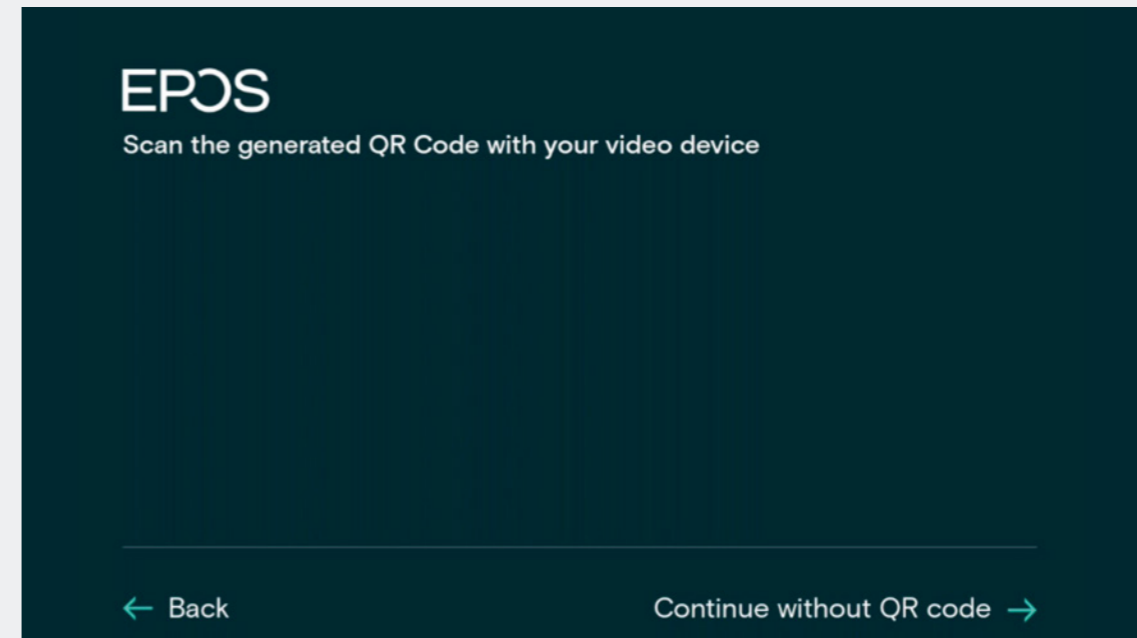


EXPAND Control Scan QR code.

Scan QR code > point your QR code to the camera.

## EPOS Manager Provisioning

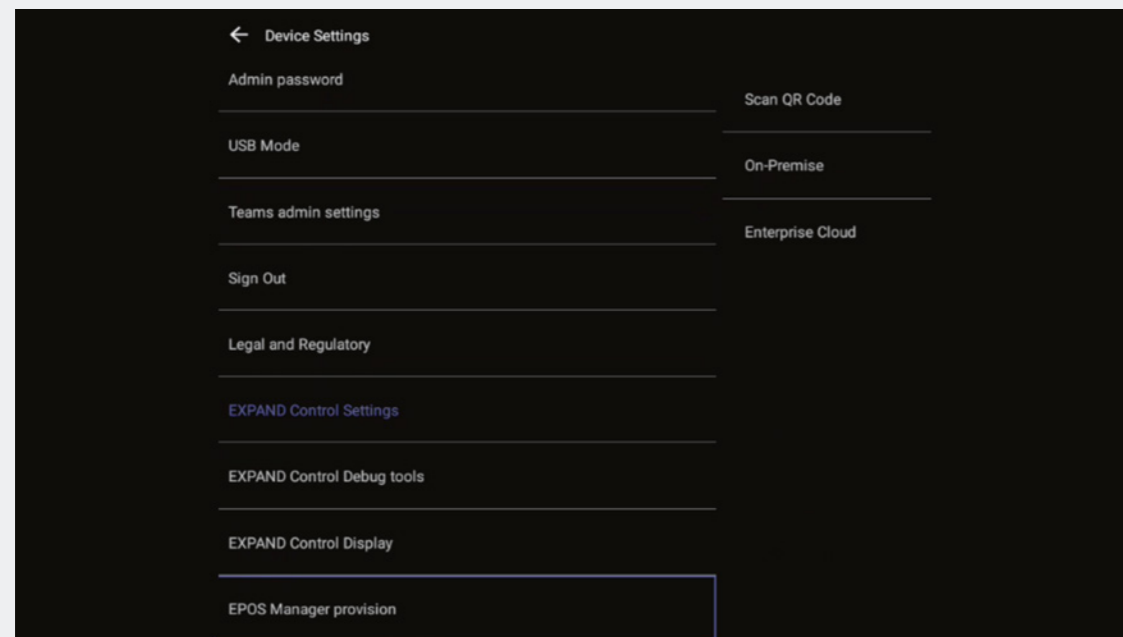


If you didn't enroll the device into EPOS Manager to begin with, you can create your QR code and insert the QR Code in the system. Scan you QR code, choose on-prem and Enterprise Cloud.

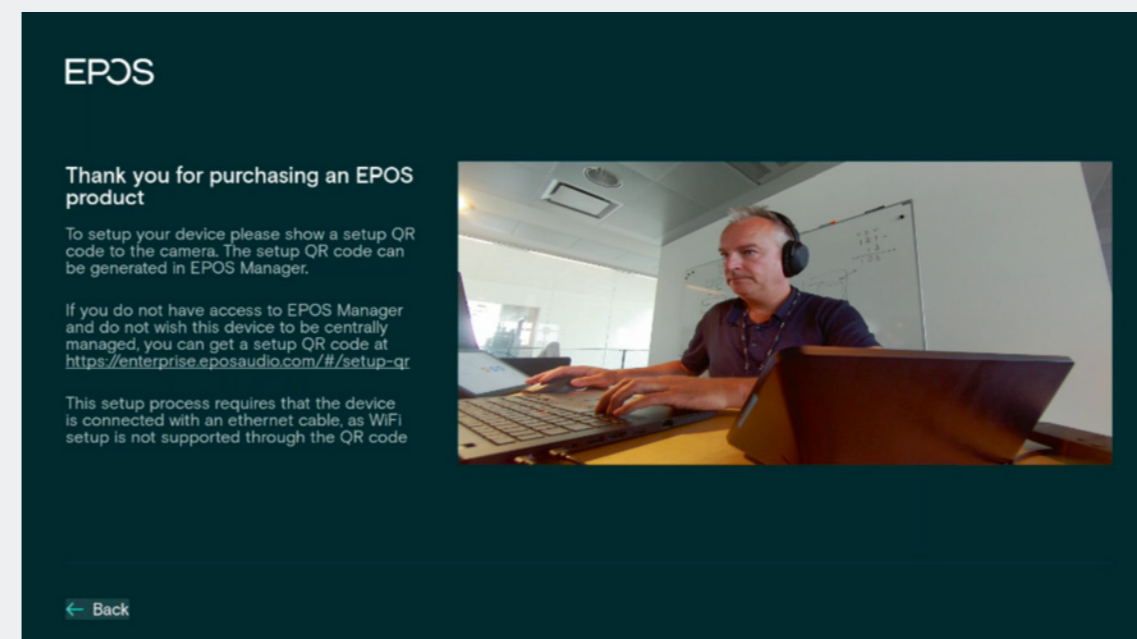


Monitor scan QR code.


## Camera Settings

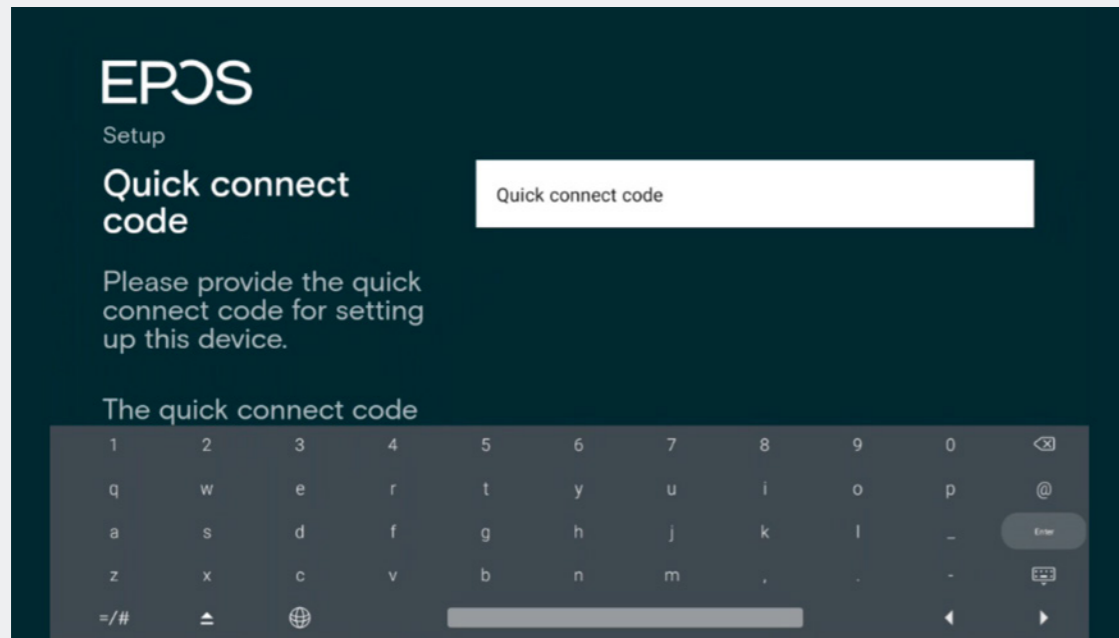

EPOS Manager Provision Save & Continue.

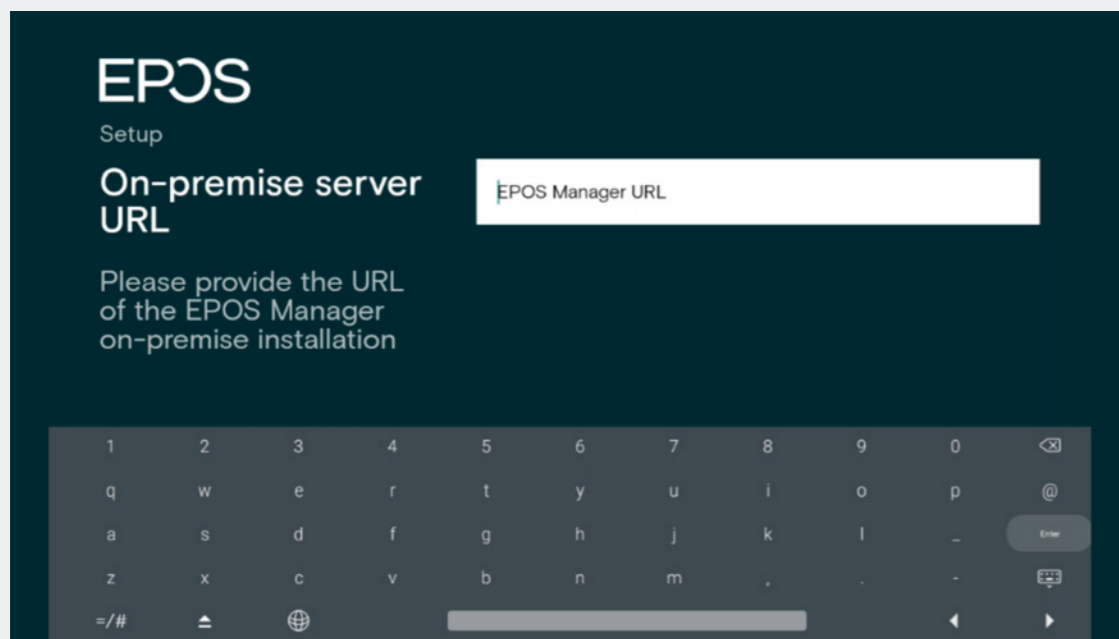

On premise URL.

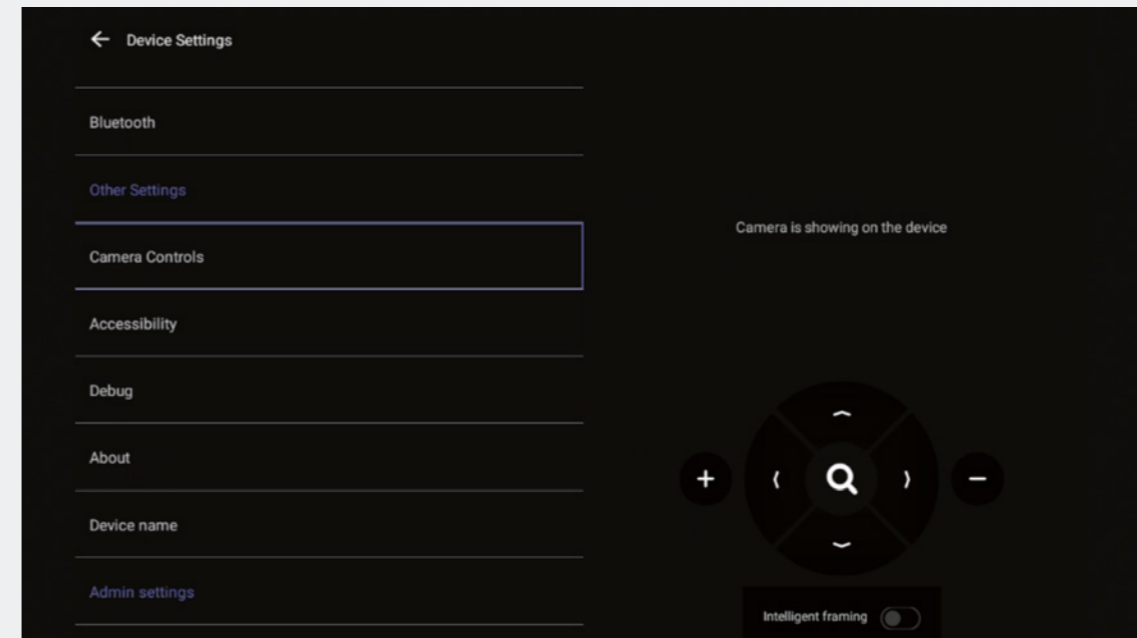

Device settings > Camera settings

Video feed will be displayed on the monitor.

**Ensure the camera is properly adjusted. You also have the option to enable intelligent framing. This feature allows the camera to adjust the video feed based on the number of people and their positions in the video room.**

Learn more about how to install and use the EXPAND Vision 5 here:

**Access the learning videos:**

[EPOS Employees](#)

[Partners and Customers](#)

THE POWER OF AUDIO

**EPOS**

EPOS Group A/S  
Industriparken 27  
2750 Ballerup, Denmark  
[eposaudio.com](http://eposaudio.com)